



[www.schildr.global](http://www.schildr.global)



**DYNAMIC**

Retractable Glass Roof

# LIFT & SLIDE DOORS

Dynamic with  
Lift & Slide Doors  
Maximum Insulation

Thermal break Aluminum profile



# BIFOLD DOORS

Dynamic with  
Bifold Doors  
Maximum Openness

Thermal break Aluminum profile



# GUILLOTINE COMPACT


Dynamic with  
Guillotine Compact  
Vertical Sliding Door/Window

Thermal break Aluminum profile



# SLIDING GLASS

Dynamic with  
WD240-Sliding Doors  
Maximum Functionality



All Seasons



Resists bad  
weather



Fire  
retardant




Partial  
blackout



Dimmable  
LED lights



Remote  
controlled




Custom  
finishes




Built  
to last


Four seasons are habitable with DYNAMIC's high performance sealing that is resistant to harsh climatic conditions. The aesthetic appearance of the structure will improve the look of property without interfering with the landscape

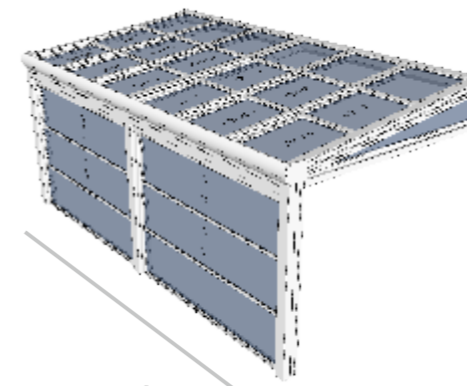


GE300

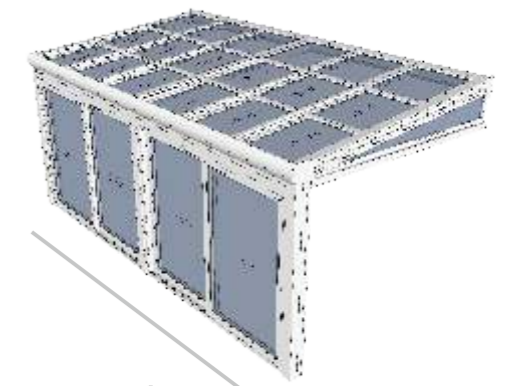


LS300

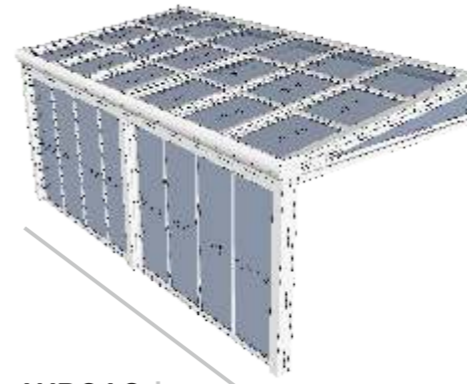


WD240

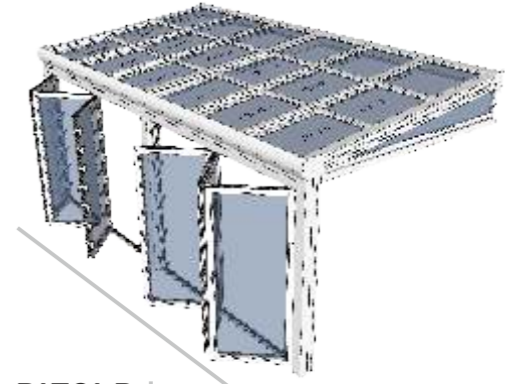


BIFOLD

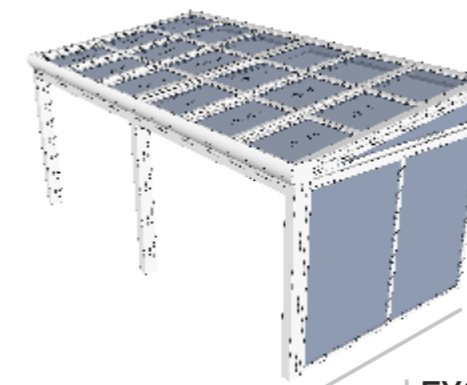


FX20

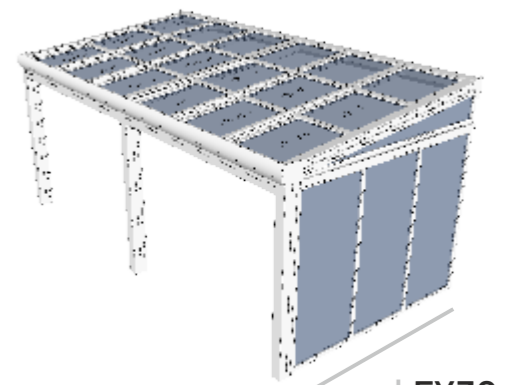

FX30

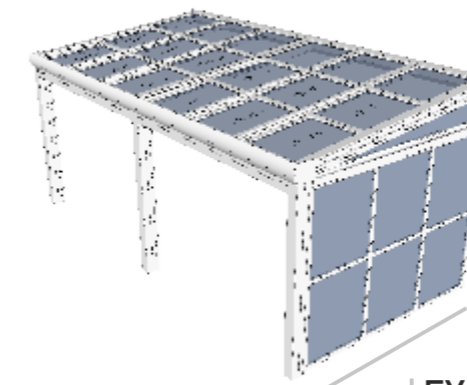

FX60

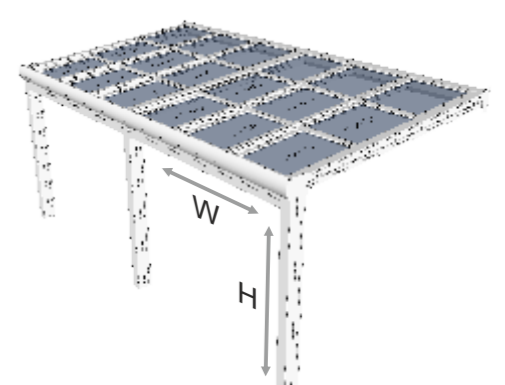

## RETRACTABLE GLASS ROOF

Dynamic is sunroom system with retractable glass roof panels. It can provide up to 75% sky openness. Heat insulated, remote controlled, its designed to provide functionality and durability in mind alongside maintaining an aesthetically pleasing look.

### Without any additional supporting steel structure:

- Up to 15' projection
- No restriction on width
- Can be attached to existing building

### Additional features include:

- Front posts with hidden built-in downspouts
- All low-E glass for better heat management
- Insulated glass
- Tempered on outer layer
- Tempered & laminated on inner layer
- Maximum sky openness of 66% or 75%

### APPLICATION

Rooftops, Conservatories,  
Greenery, Terraces, Pools



## WALL MOUNTED CONTROL

Connected Living

- Manually override control functions when necessary.
- Direct and simple approach to operating projection screens.
- Quick and easy connection and operation.



## 1-5 CHANNEL REMOTE CONTROL

Description


- Each channel can control an individual motorized product or a group of motorized products which provides practical and flexible control options.
- Multiple finishes
- Choose from white, silver, black or blue and white to fit your style and preference.
- Radio Technology Somfy



## 1-16 CHANNEL REMOTE CONTROL

Description

- Easy programming.
- Clear design with an on-screen display.
- Greater personalization.
- The "my" button allows to set a favorite position for an individual or a group of motorized applications for quick and easy access.
- For use with any Somfy motorized window coverings.

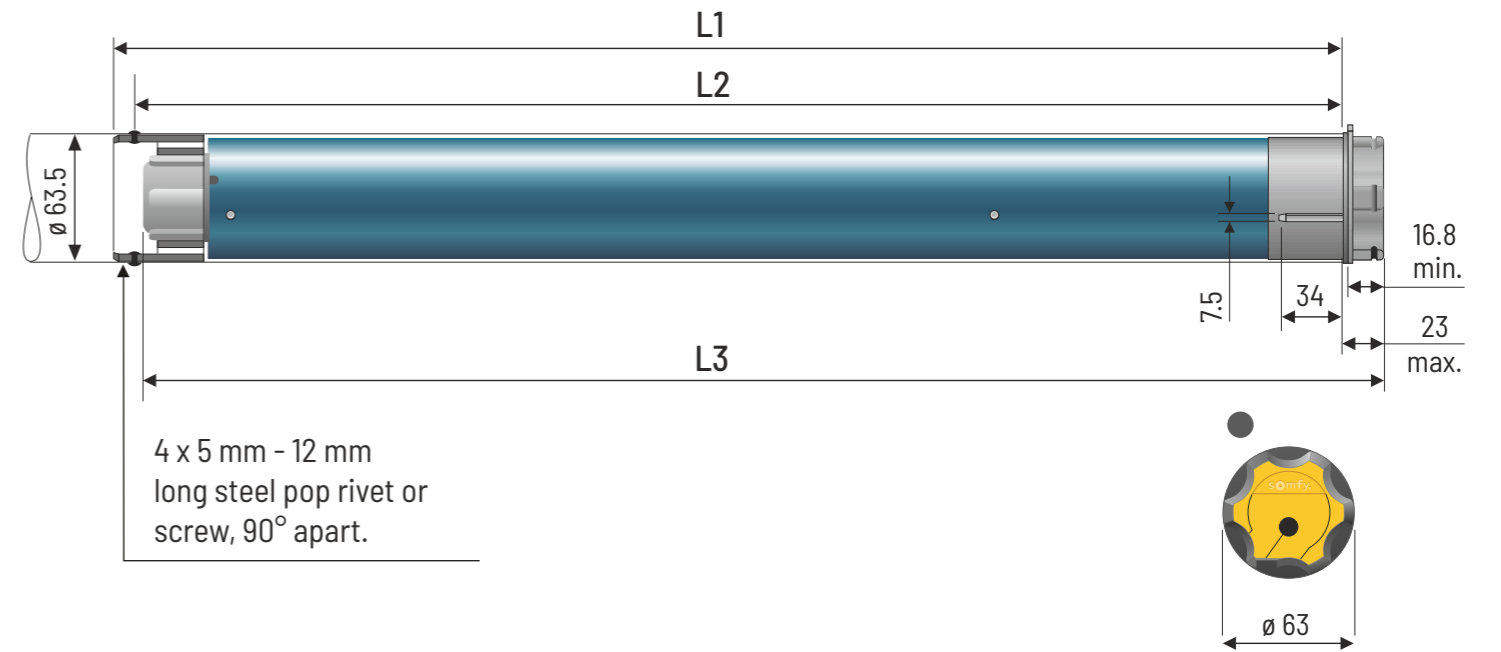


## SPECIFICATIONS

## 6100R2

Torque (in. lbs.)	100 Nm (880 in. lbs.)
Nominal Voltage	120V / 60Hz
Rated Current	3.8A
Speed	14 rpm
Thermal Protection	4 minutes
Radio Frequency	433.42 MHz
Sound Level	$\leq 67$ dBA

**somfy**

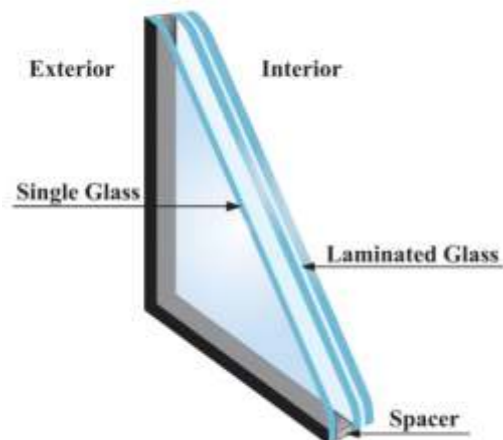

ALL GLASSES ARE TEMPERED



## DYNAMIC / WHITE

Standard frame color /ral 9010  
textured (pulver) white



## DYNAMIC / ANTHRACITE

Standard frame color /ral 7016  
textured (pulver) gray anthracite



## DYNAMIC / WOOD FINISH

Wood finish and other ral colors  
available upon special request

